



PCT/AU2004/001595

Patent Office
Canberra

I, LEANNE MYNOTT, MANAGER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2003906339 for a patent by INNOVATION CENTRAL PTY LTD as filed on 18 November 2003.



WITNESS my hand this
Third day of December 2004

A handwritten signature in black ink, appearing to be "LM", written over a horizontal line.

LEANNE MYNOTT
MANAGER EXAMINATION SUPPORT
AND SALES

BEST AVAILABLE COPY

AUSTRALIA
Patents Act 1990

PROVISIONAL SPECIFICATION

Invention Title: **A Protecting Apparatus**

Applicant: **Innovation Central Pty Ltd**

The invention is described in the following statement:

A Protecting Apparatus

Field of the Invention

- 5 The invention relates to a protecting apparatus for protecting structures from impact damage.

Background of the Invention

- 10 In many warehouses, goods are stored in racking systems and are accessed by fork lifts or other vehicles. The structural supports for such racking systems often become damaged because they are repeatedly impacted against by the fork lifts. Various protective devices have been developed in an attempt to prevent or at least limit damage to such structural supports.

15

The present invention seeks to provide an improved protecting apparatus which can be used to protect a wide variety of different structures.

Summary of the Invention

20

- According to the present invention there is provided a protecting apparatus for a structure, said protecting apparatus including a bumper member and a structure positioning member, said structure positioning member being arranged in use to be positioned in contact with or adjacent to a portion of the structure, said bumper member and said structure positioning member being joined by at least one resiliently flexible joining portion so that when a surface of the bumper member is impacted the impact force is dissipated by flexure of said at least one joining portion.

25

- 30 The impact force may also be dissipated by flexure of said bumper member and/or the structure positioning member.

Preferably, each resiliently flexible joining portion adopts a tortuous path between the bumper member and the structure positioning member. The tortuous path is preferably curved so as to minimise any points of stress concentration along said path.

5

One end of each said joining portion is preferably connected to the bumper member and the other end is preferably connected to the structure positioning member. Connection preferably occurs at a zone of connection so as to minimise stress concentrations in the protecting apparatus. Stress concentrations are preferably minimised by curving the zones of connection.

10

In accordance with a preferred embodiment of the invention, the bumper member has a first end and a second end which ends are arranged to be joined to the structure positioning member by respective first and second resiliently flexible joining portions. These first and second joining portions, the bumper member and the structure positioning member are shaped so as to define an opening in which the portion of the structure to be protected can be received.

15

Preferably, at or adjacent to each of the first and second ends of the bumper member is tongue which is arranged in use to contact the structure when it is located in the opening and to facilitate retention of the protector apparatus about said structure. A tongue may also be formed on each of the first and second joining portions to further facilitate retention of the protecting apparatus about said structure.

20

25

The protecting apparatus may be arranged to be retained tightly on the structure (i.e. fixed in one position) or may be retained in a manner which allows it to be slid along the length thereof.

30

Preferably, the tongues are resiliently flexible and arranged so that they are deflected in order to receive the portion of the structure within the opening and, once the portion is located in the opening, arranged to engage against the structure.

As an alternative to the tongues or in addition thereto, a securing member may be provided to retain the protecting apparatus about said structure. The securing member may be a threaded member arranged to be screwed through
 5 the protecting apparatus and into the structure. A groove or slot may be provided in the protecting apparatus to receive the threaded member.

The bumper member is preferably configured so as to extend about a major portion of the structure so as to protect as much of the structure as possible.

10

The surface of the bumper member is preferably smooth and continuous.

The protecting apparatus is preferably formed so that a plurality of such apparatus can be located along a length of the structure. The plurality of
 15 protecting apparatus may be spaced from one another or arranged so that they ~~stack~~ one on top of the other.

The bumper member, structure positioning member and said at least one joining portion are preferably integrally formed. In accordance with an
 20 embodiment of the invention, the protecting apparatus is moulded as one piece in a plastics material. Preferably, the protecting apparatus is injection moulded.

The material from which the protecting apparatus is made is preferably selected with consideration to the environment in which it is to be used (e.g. extreme
 25 ~~-temperature -environments,~~ high u.v. ray environments, corrosive ~~environments~~).

Description of the Drawings

30 An embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a view of a structural support on which are located ten individual protector apparatus in accordance with an embodiment of the invention;

Figure 2 is a plan view of one of the protector apparatus shown in Figure 1; and

Figures 3 and 4 are perspective views of the protector apparatus shown in Figure 2.

Detailed Description of the Preferred Embodiment

Figure 1 illustrates ten different protecting apparatus 10 located about a structural support 100 for a racking system. The protecting apparatus 10 are stacked one on top of the other so as to provide protection for a substantial portion of the length of the structural support 100.

Figure 2 illustrates one of the protecting apparatus 10 shown in Figure 1. As shown, the protecting apparatus 10 includes a bumper member 12 and a structure positioning member 14. As best illustrated by Figure 1, the structure positioning member 14 is arranged in use to be positioned in contact with or adjacent to a portion of the structural support 100.

The bumper member 12 and the structure positioning member 14 are joined by joining portions 16. Four joining portions 16 are illustrated. However, it will be appreciated that varying numbers of joining portions 16 may be included. The joining portions 16 are formed so as to be resiliently flexible such that when a surface 12a of the bumper member 12 is impacted, the impact force is dissipated by flexure of the joining portions 16. The impact force may also be dissipated by flexure of the bumper member 12 and/or the structure positioning member 14. When the impact force is very high, some or all of the joining portions 16 may be caused to fracture sacrificially in order to prevent damage to the structural support 100. Similarly, the bumper member 12 and/or the structure positioning member 14 may also be caused to fracture. In such an

event, it would be advisable to replace the protecting apparatus 10 with a new one so as to ensure continued protection of the structural support 100.

As best illustrated in Figure 2, each joining portion 16 adopts a tortuous path
5 between the bumper member 12 and the structure positioning member 14. The tortuous path is preferably curved so as to minimise any points of stress concentration along the path. A tortuous path is adopted so as to better enable the joining portion 16 to accommodate impact forces. It will be appreciated that each resiliently flexible joining portion 16 acts like a spring between the bumper
10 member 12 and the structure positioning member 14 when an impact force is applied.

One end of each joining portion 16 is connected to the bumper member 12 and the other end is connected to the structure positioning member 14. These
15 respective connections preferably occur at a "zone" of connection (as opposed to a "point" of connection) so as to minimise stress concentration in these zones of the protecting apparatus 10. The zones of connection are preferably formed as smooth curves so as to thereby minimise stress concentrations.

20 The bumper member 12 has a first end 12b and a second end 12c. The ends 12b, 12c of the bumper member 12 are connected to the structure positioning member 14 by respective first and second resiliently flexible joining portions 16a, 16b. As shown in Figure 2, the first and second joining portions 16a, 16b and the structure positioning member 14 define an opening 18 in which the
25 structural support 100 can be received.

Adjacent each end 12b, 12c of the bumper member 12 is a tongue 20. The tongues 20 are arranged in use to contact the structural support 100 when it is located in the opening 18 and to facilitate retention of the protecting apparatus
30 10 about the structural support 100. In accordance with a preferred embodiment, the tongues 20 are resiliently flexible. This enables the protecting apparatus 10 to be located about the structural support 100 by aligning the structural support 100 with the opening 18 and then pushing the protecting

apparatus 10 there against. This will cause the tongues 20 to deflect so as to allow the structural support 100 to be received in opening 18. When the structural support 100 is received in the opening 18, the resiliently flexible nature of the tongues 20 causes them to try to return to their original orientation, resulting in them engaging against the structural support 100. This engagement facilitates retention of the protecting apparatus 10 about the structural support 100.

Additional tongues 22 may be provided on the first and the second joining portions 16a, 16b to further facilitate retention of the protecting apparatus 10 about the structural support 100.

In addition to the tongues 20, 22 or in place thereof, a securing member (not shown) may be provided to retain the protecting apparatus 10 about the structural support 100. The securing member may be a threaded member arranged to be screwed through the protecting apparatus 10 and into the structural support 100. A groove or slot may be provided in the protecting apparatus 10 to receive the threaded member.

In accordance with the illustrated embodiment, the surface 12a of the bumper member 12 is shown as being smooth and continuous. However, other finishes on the surface 12a may be adopted.

The bumper member 12, structure positioning member 14 and joining portions 16, 16a, 16b are integrally formed. The protecting apparatus 10 is preferably moulded as one piece in a plastics material. The protecting apparatus 10 is preferably injection moulded or may be extruded as a continuous form.

As will be appreciated from Figure 1, each protecting apparatus 10 is arranged to wrap about a major portion of the periphery of the structural support 100 to provide substantial coverage and therefore protection thereof. A plurality of protecting apparatus 10 can be located on the structural support 100 so as to provide protection to the entire length of the structural support 100 if desired.

The protecting apparatus 10 may be spaced from one another or stacked one on top of the other.

5 The length of the protecting apparatus 10 (i.e. the dimension of the apparatus 10 in a direction parallel to the length of the structural support 100) may be varied to suit different needs. However, it is recognised that it may be advantageous to use a plurality of smaller protecting apparatus 10 to protect a structural support 100 rather than a very large apparatus 10. This is because in a situation where a fracture occurs in the protecting apparatus 10, it may be
10 more cost effective to replace a number of smaller protective apparatus 10 as opposed to a single large protecting apparatus 10.

It will also be appreciated that different coloured or patterned protecting apparatus 10 could be provided. Thus, by stacking numerous protecting
15 apparatus 100 one on top of the other, different patterns etc could be achieved.

It will be appreciated by those skilled in the art that the material from which the protecting apparatus 10 is made may need to vary and be selected to accommodate different working environments. For example, different materials
20 may need to be used if the protecting apparatus 10 was used in an extremely cold environment (for example, a cold room) as compared to when the protecting apparatus 10 was used in a corrosive environment.

It is envisaged that protecting apparatus in accordance with an embodiment of the invention would have application in a wide variety of areas. For example,
25 such protecting apparatus may be used to protect structural supports for racking systems, rails, balustrades, posts, wall edges, vehicle edges, garage supports, signage and attachments to heavy transport vehicles and caravans.

30 It will also be appreciated that the configuration of a protecting apparatus in accordance with an embodiment of the invention will vary in order to enable it to be fitted to structural supports and structures of different configurations. To this

end, for example, the size and configuration of the opening 18 and the tongues 20, 22 may need to be varied.

5 Embodiments of the invention provide a very simple but yet effective way of providing impact protection to many different forms of structures. Additionally, protecting apparatus according to the invention are relatively simple and cost effective to manufacture, are easily installed and easily replaced when damaged.

10 The embodiments have been described by way of example only and modifications within the spirit and scope of the invention are envisaged.

Dated: 18 November 2003

PHILLIPS ORMONDE & FITZPATRICK

15 Attorneys for:

Innovation Central Pty Ltd

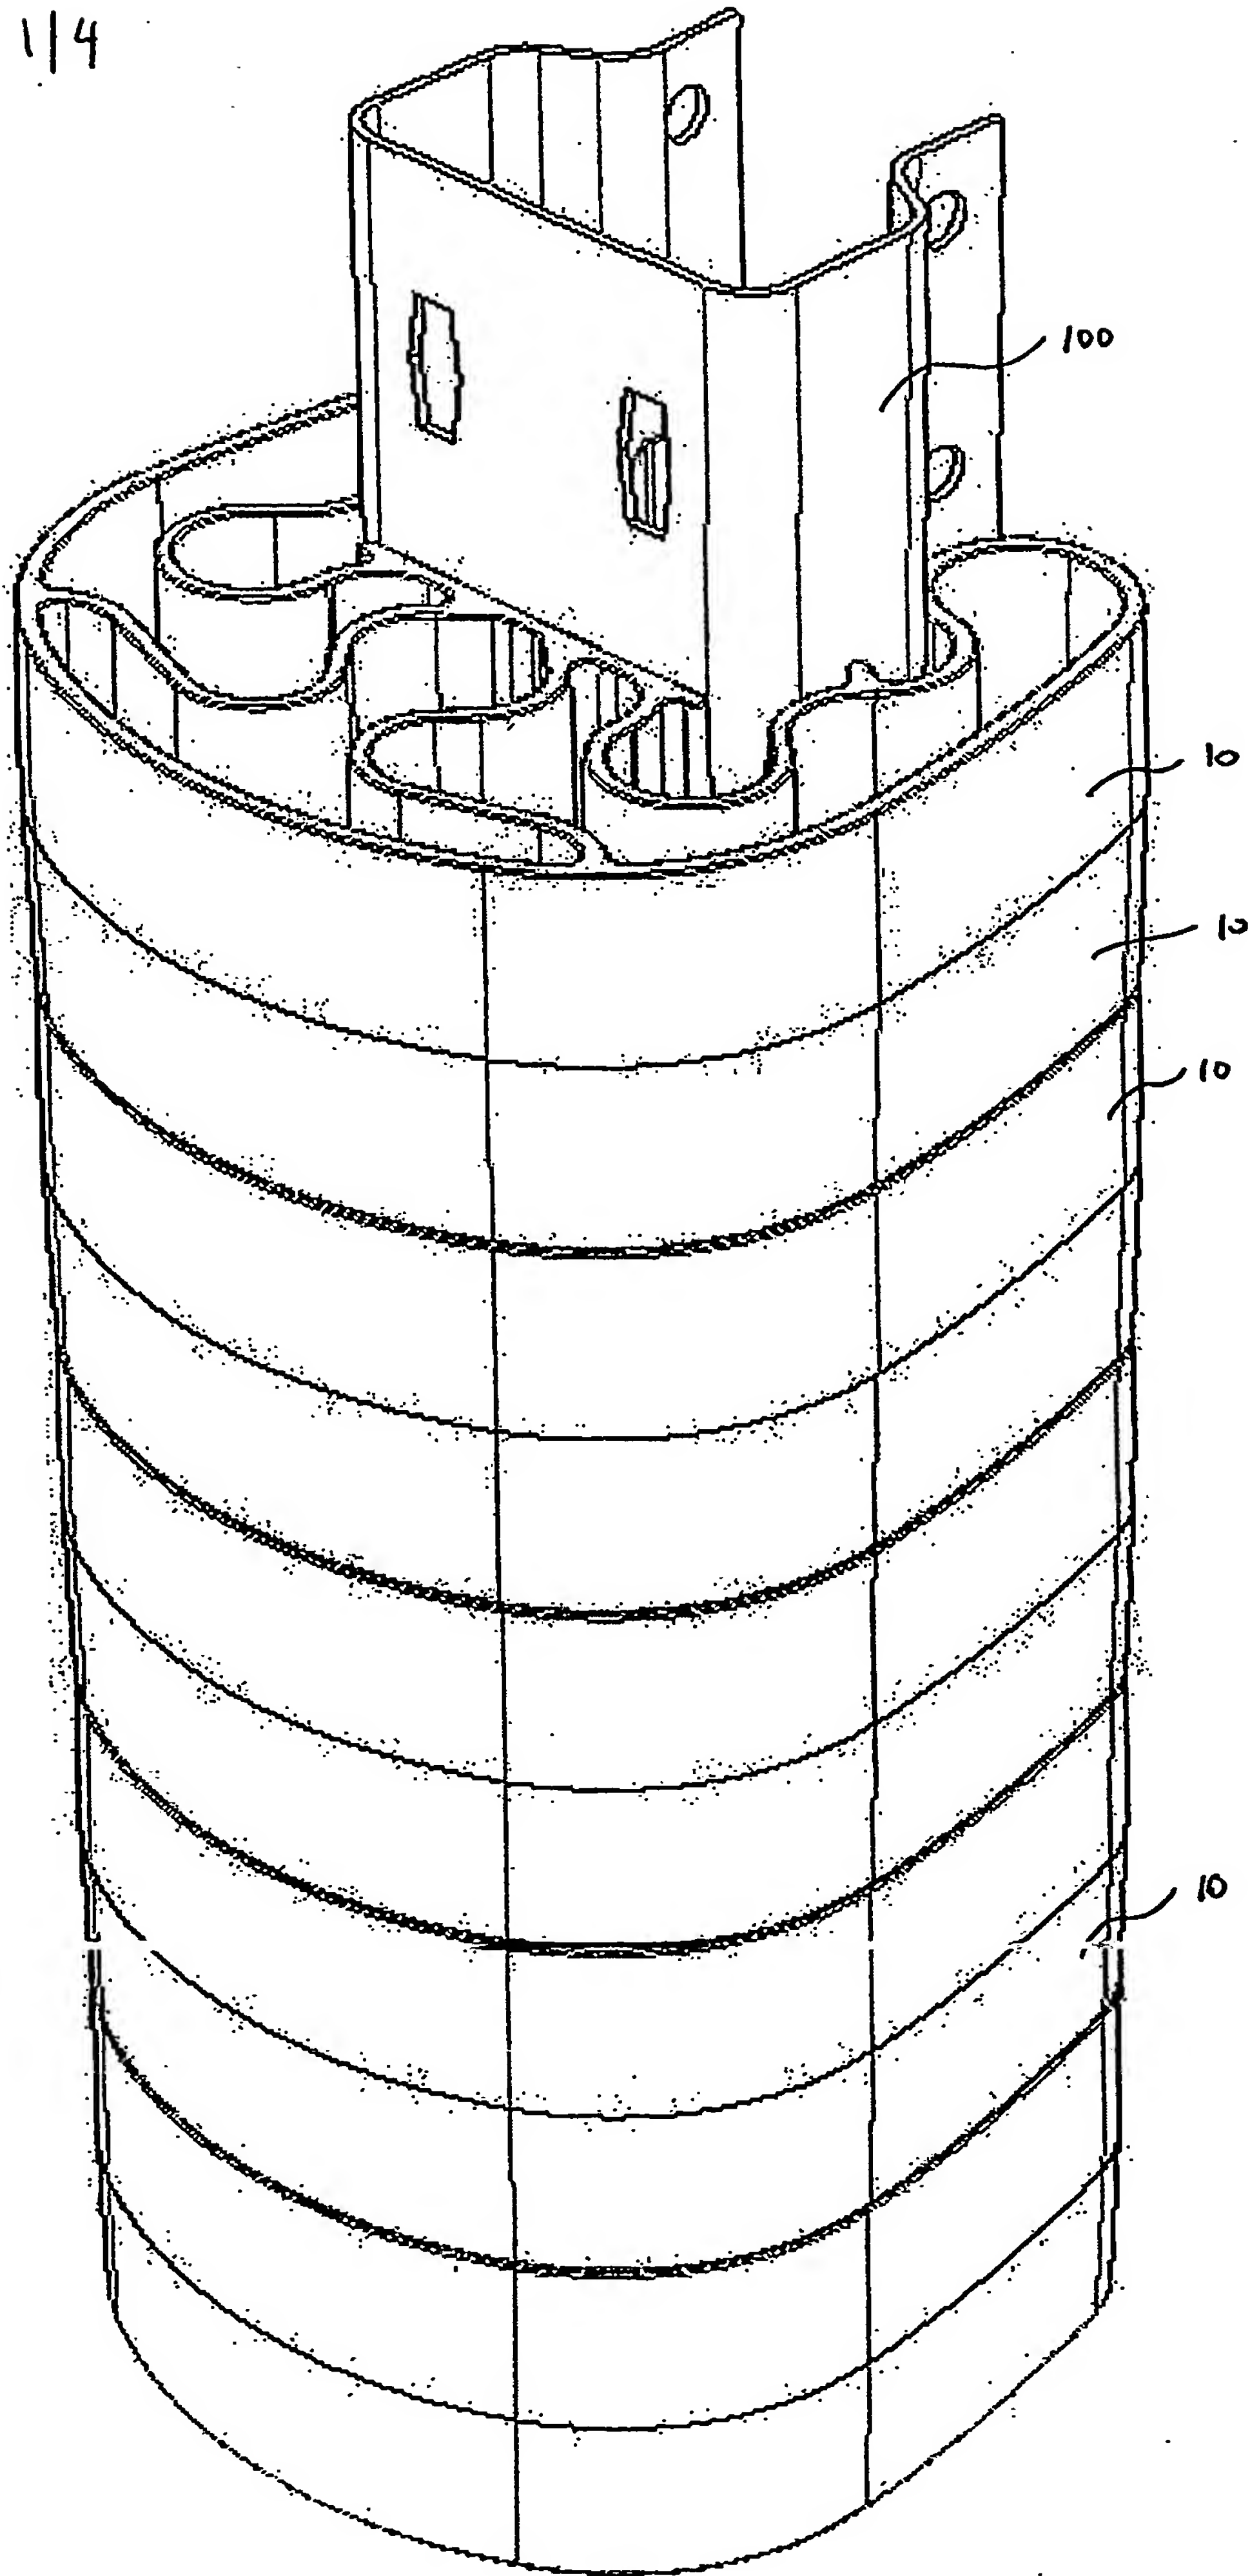


Figure 1

Figure 2

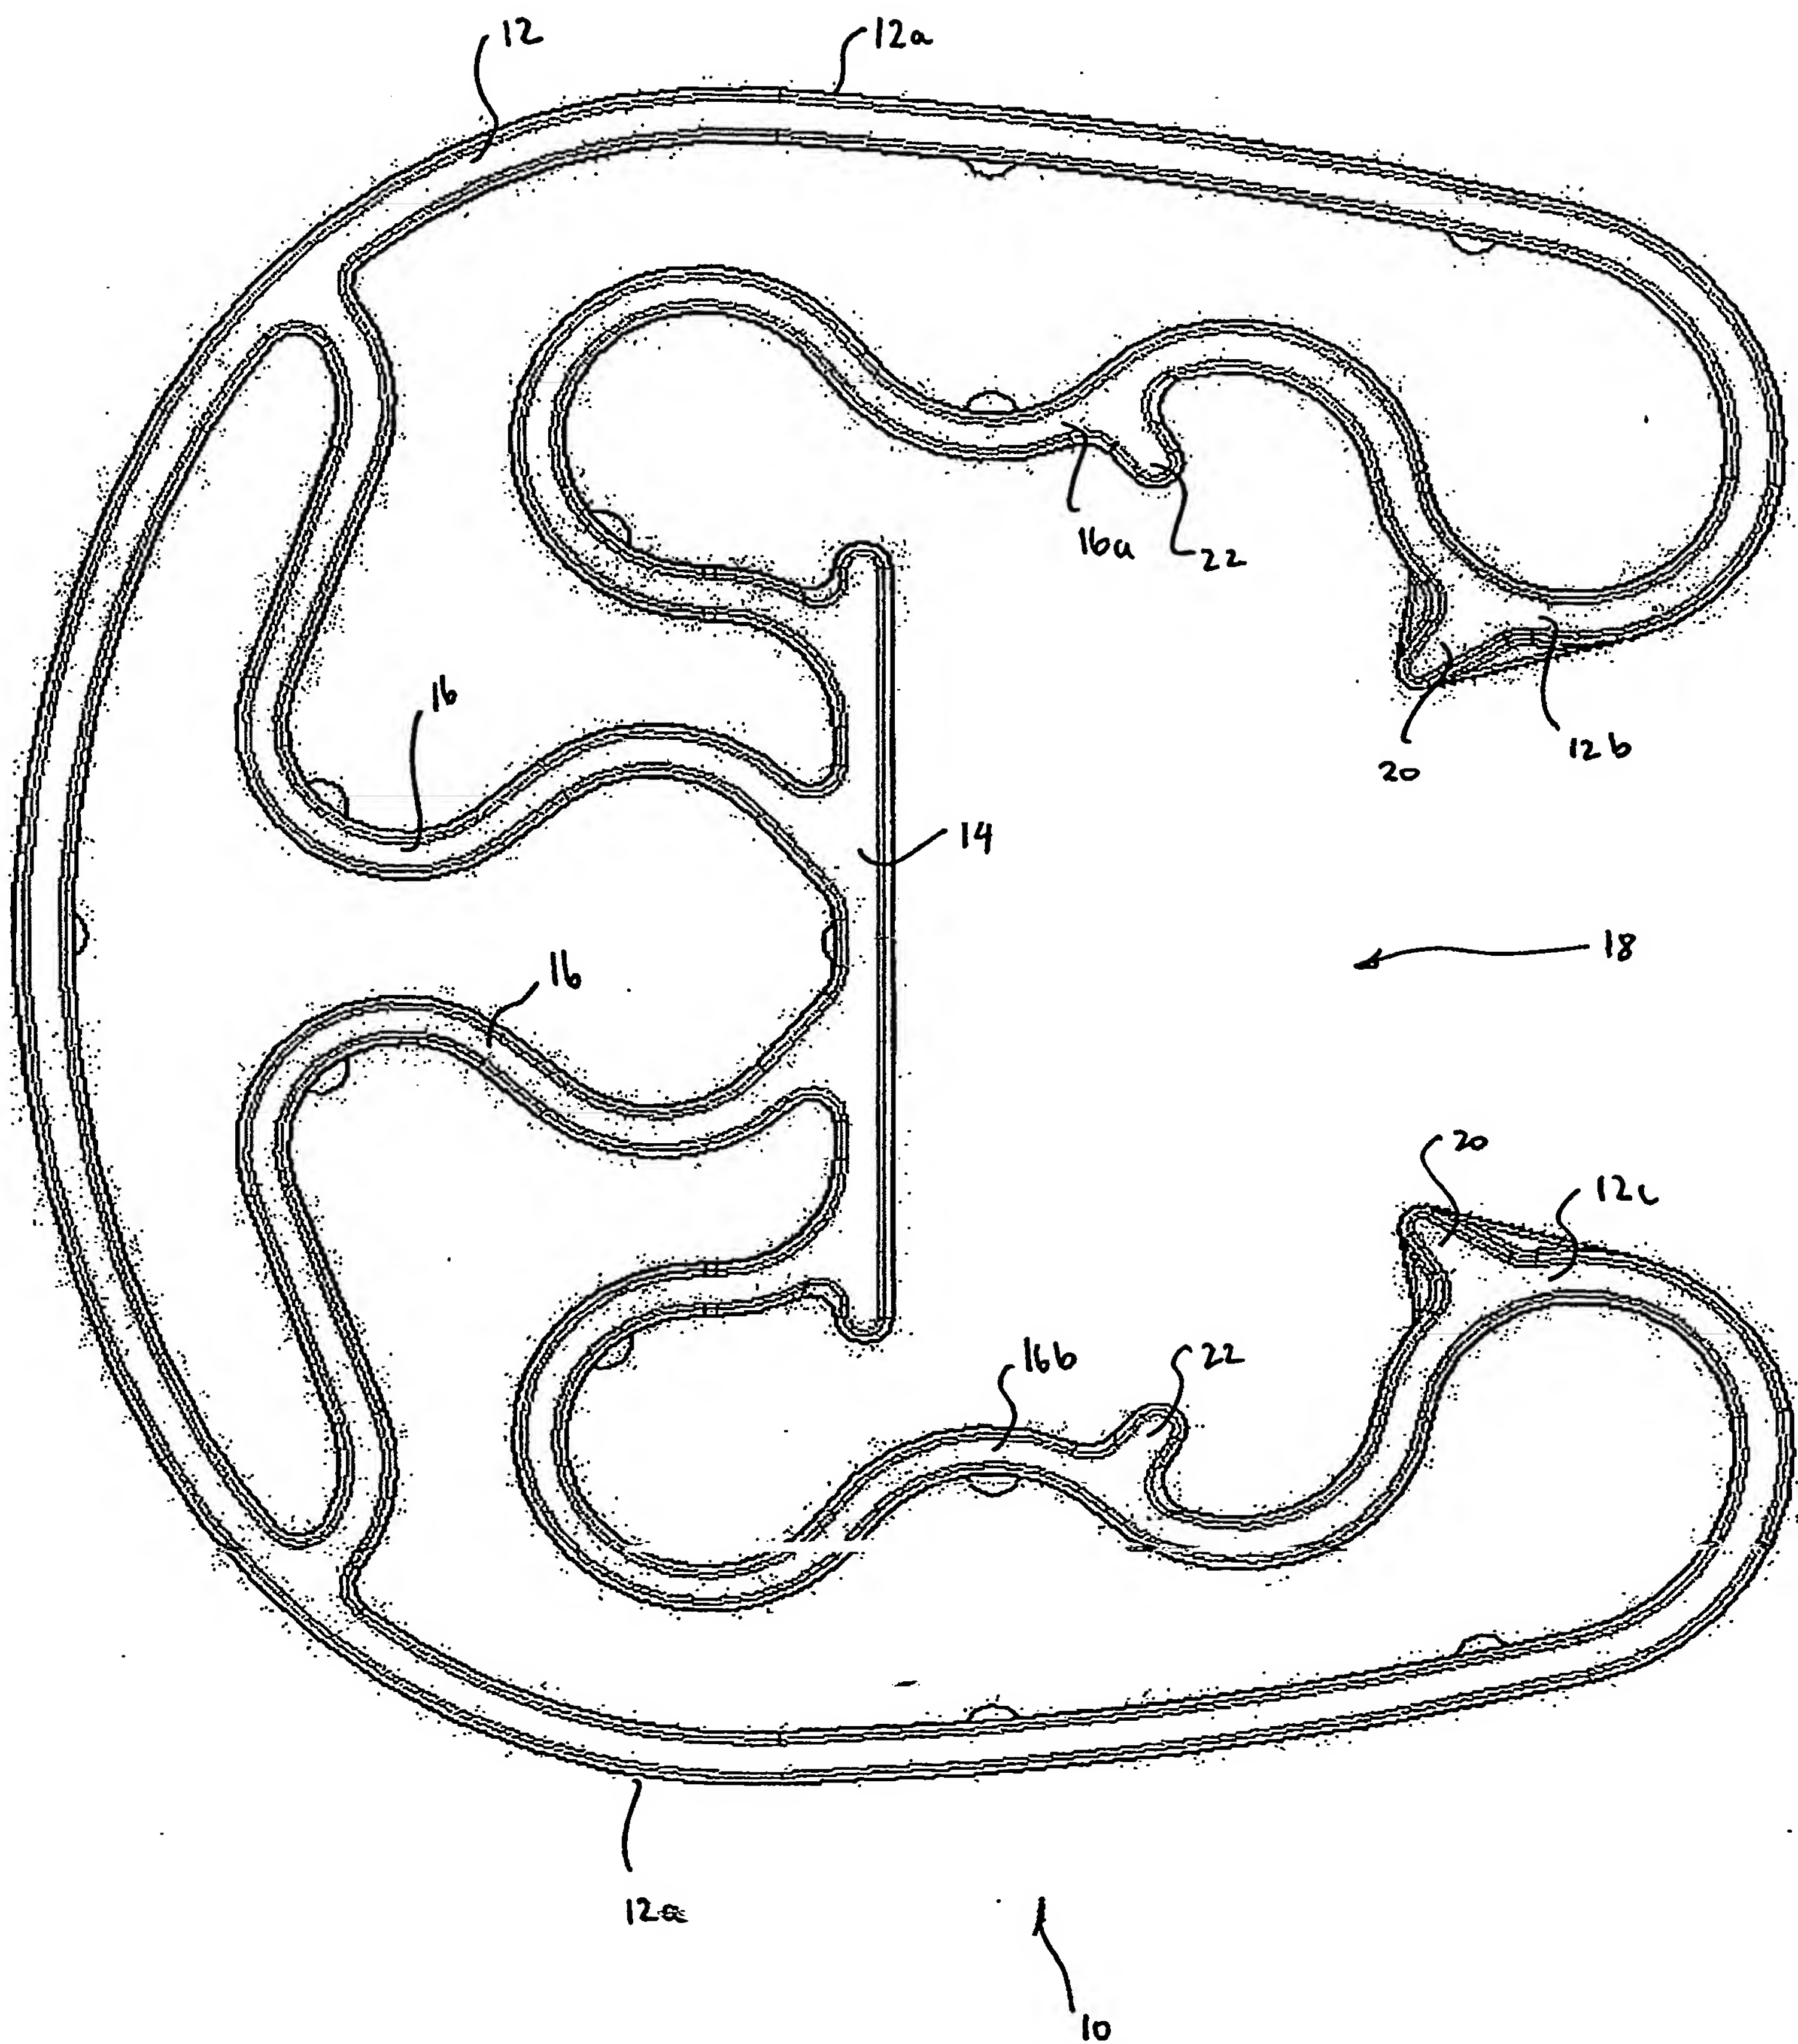
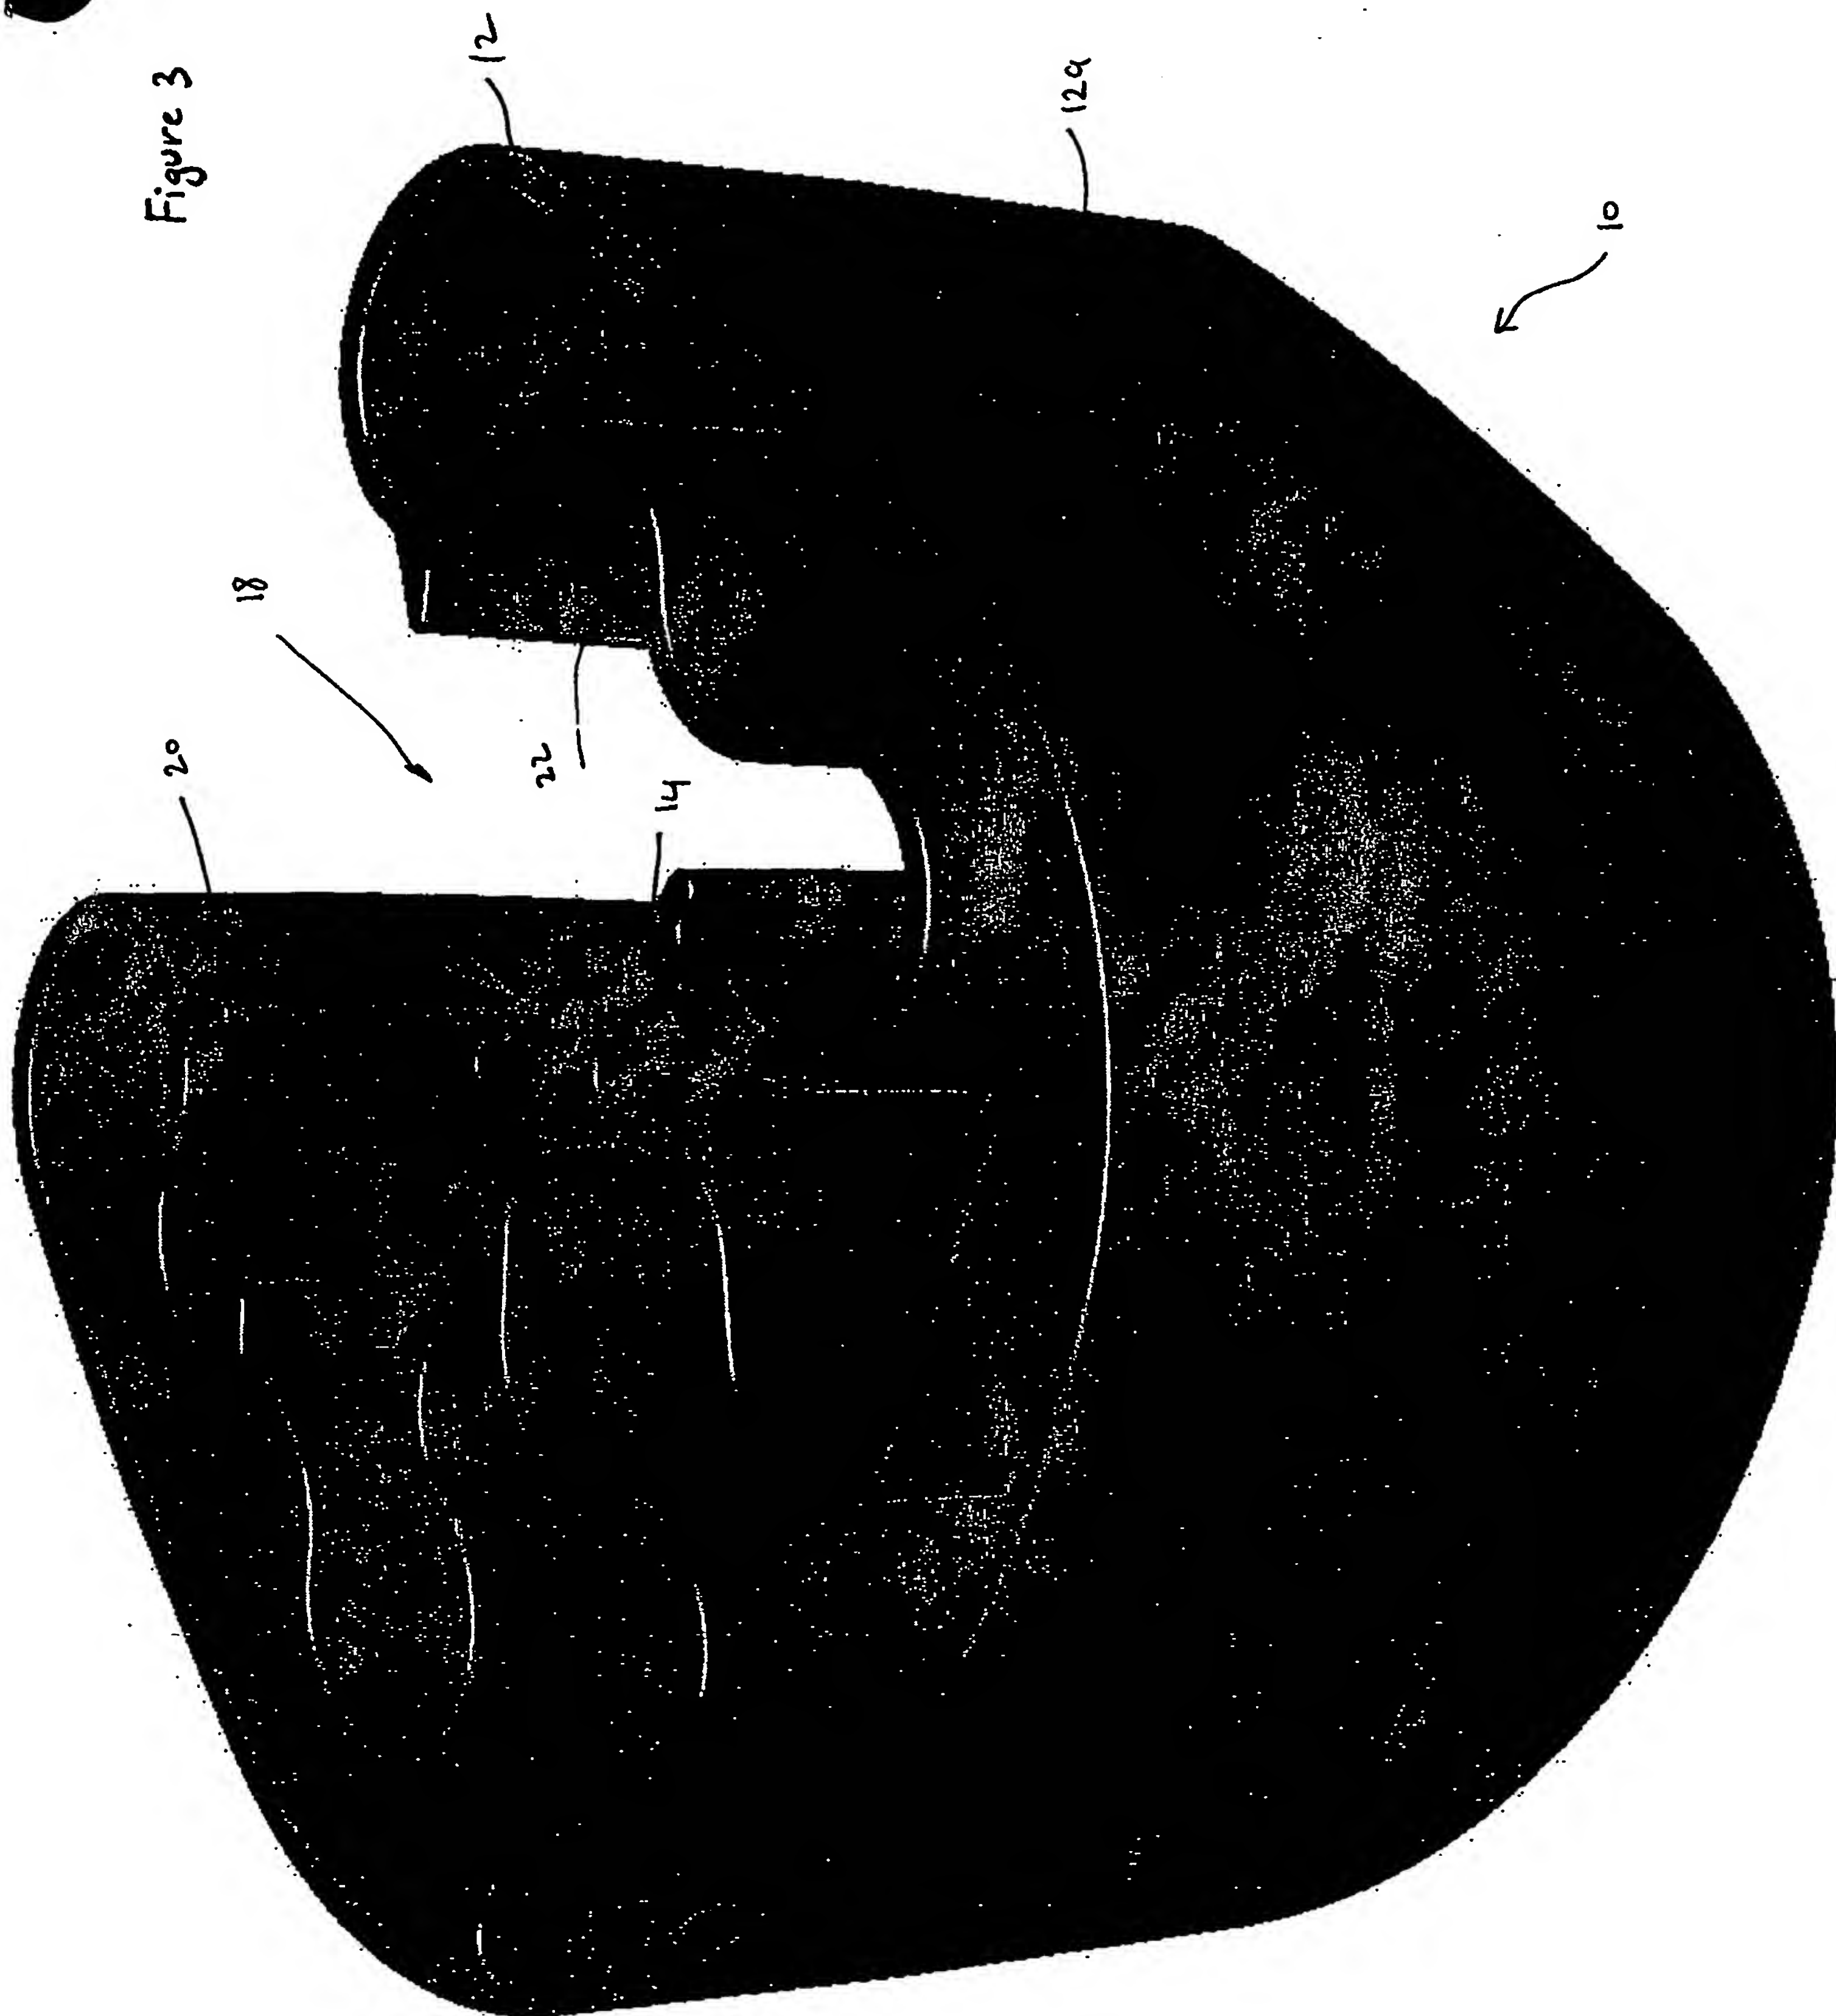


Figure 3



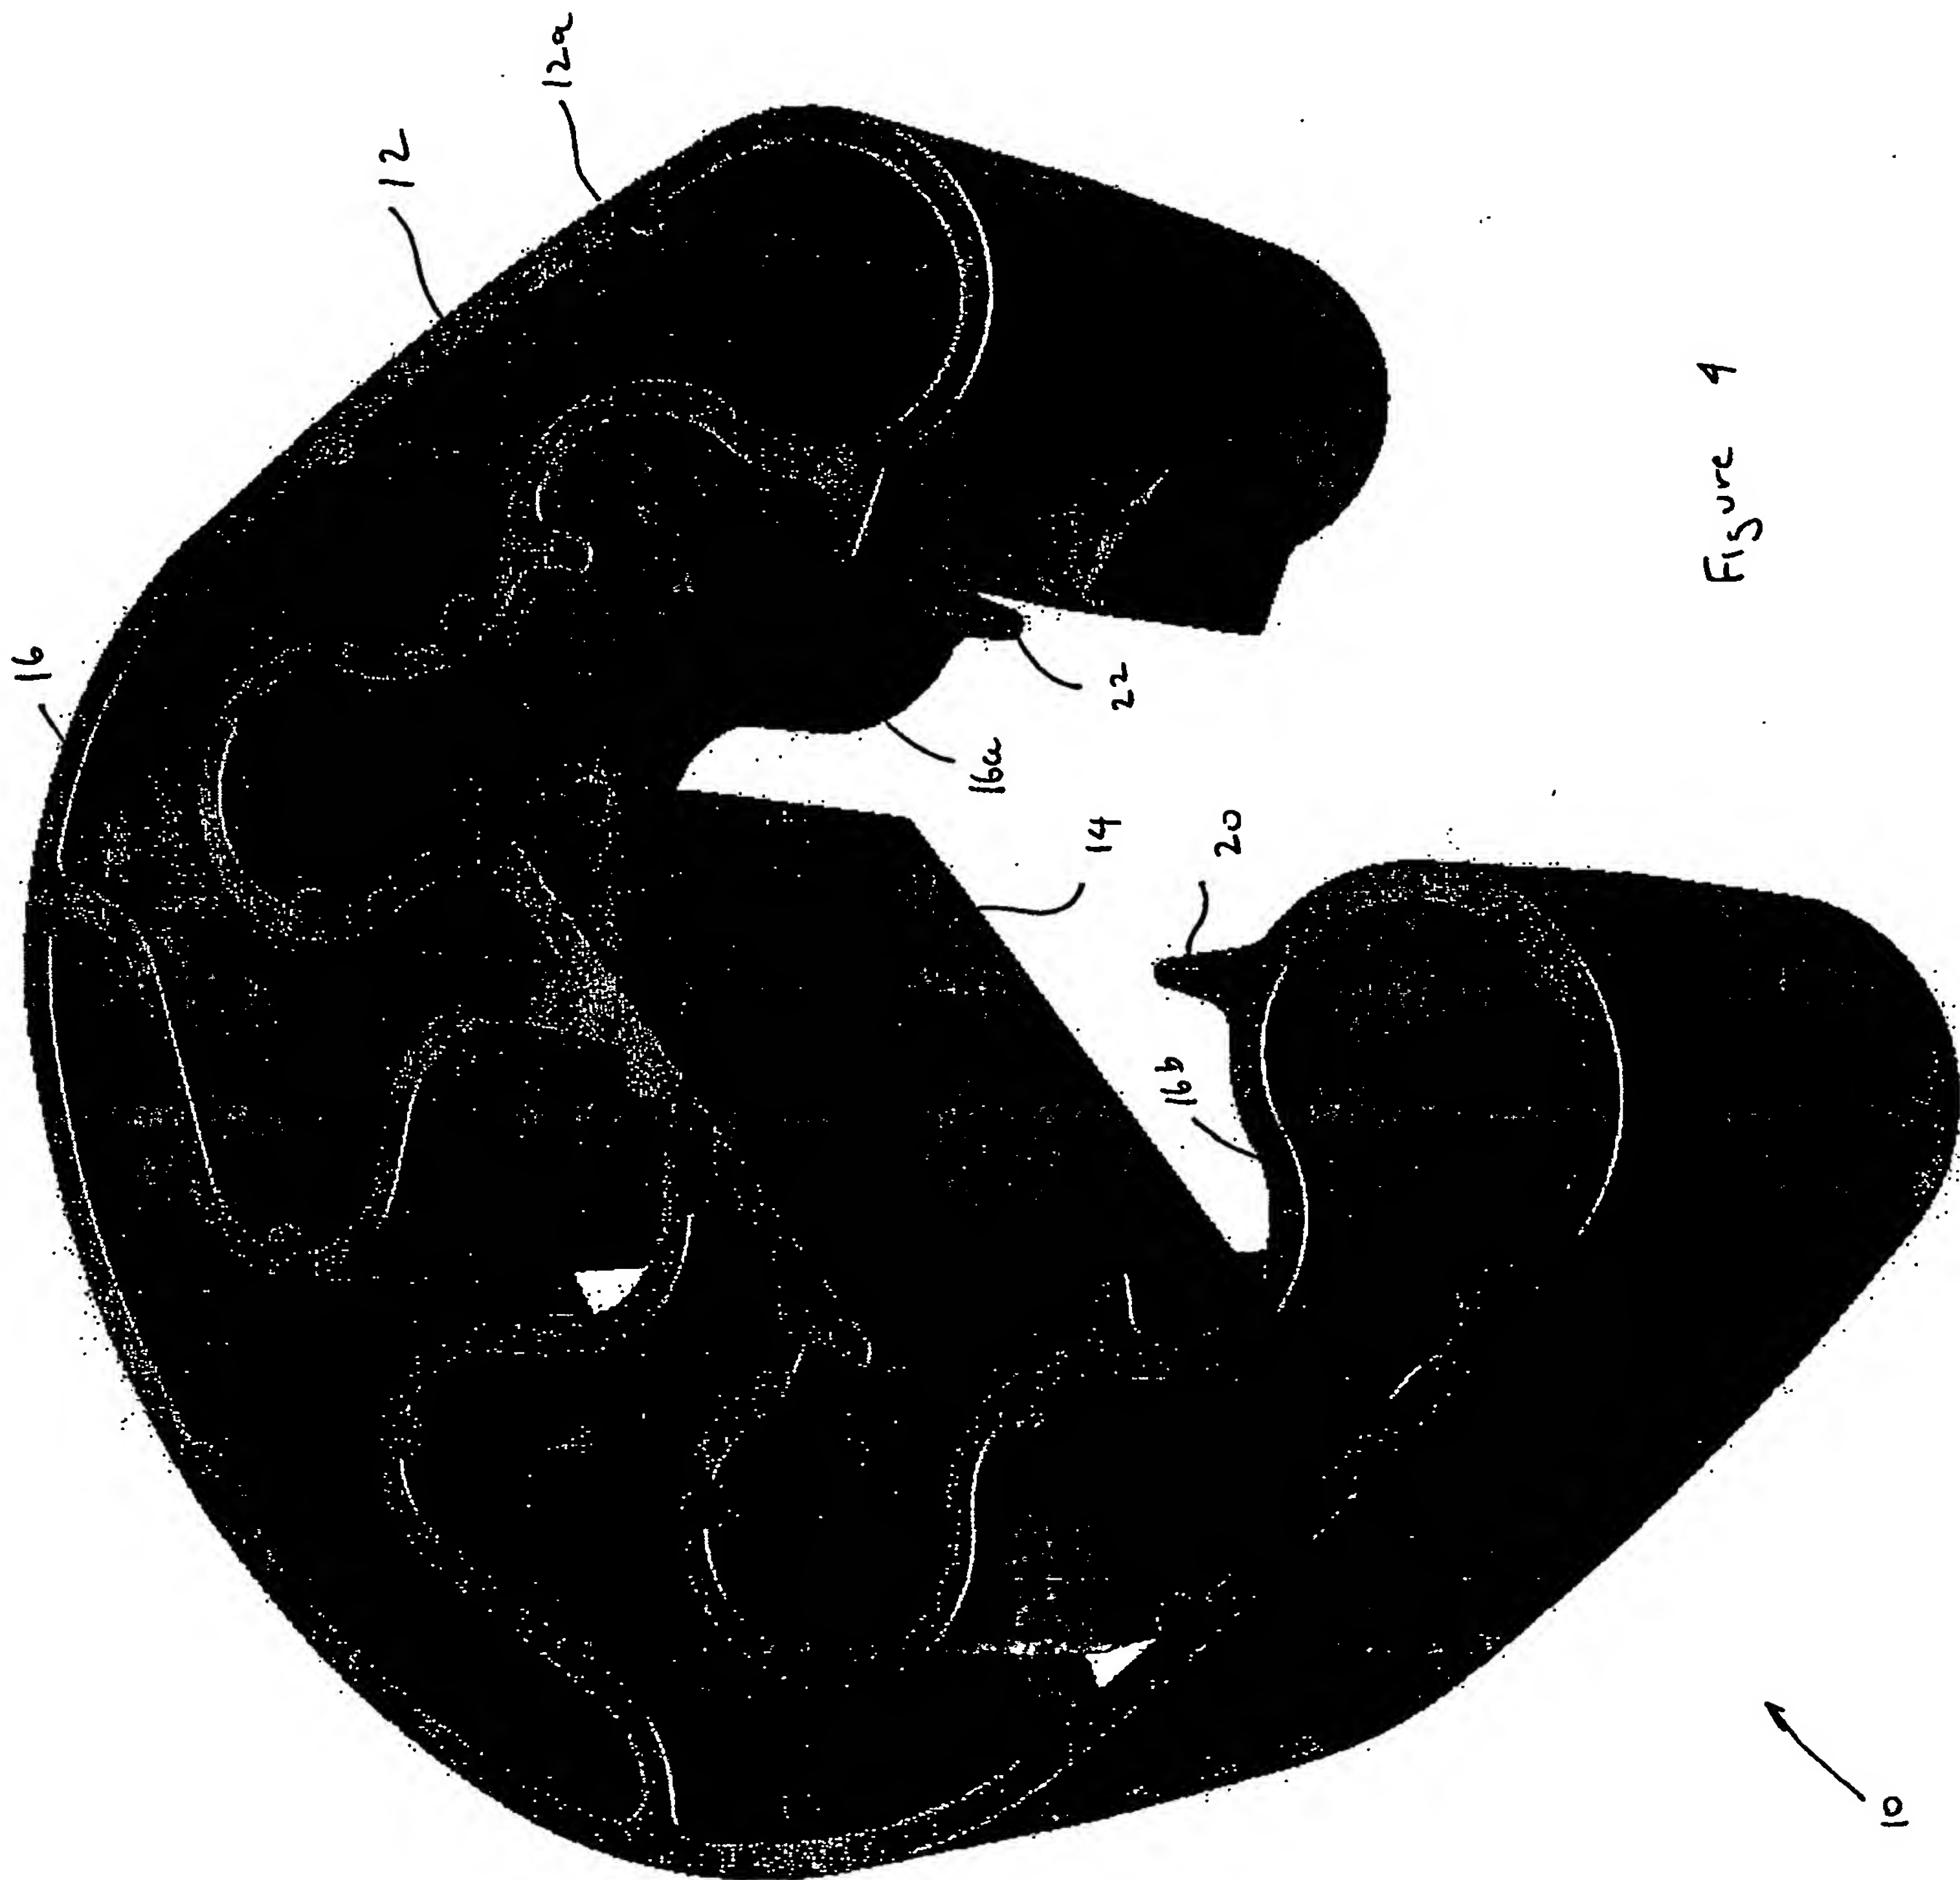


Figure 9

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/AU04/001595

International filing date: 18 November 2004 (18.11.2004)

Document type: Certified copy of priority document

Document details: Country/Office: AU
Number: 2003906339
Filing date: 18 November 2003 (18.11.2003)

Date of receipt at the International Bureau: 13 December 2004 (13.12.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.